

AdGAP: Advanced Global Average Pooling Supplementary Material

Arna Ghosh
McGill University
Montreal, QC H3A 0G4. Canada.
Email: arna.ghosh@mail.mcgill.ca

Biswarup Bhattacharya *
University of Southern California
Los Angeles, CA 90089. USA.
Email: bbhattac@usc.edu

Somnath Basu Roy Chowdhury *
Indian Institute of Technology
Kharagpur, WB 721302. India.
Email: brcsomnath@ee.iitkgp.ernet.in

Architecture & Results

The network architecture proposed in Figure 1 can clearly be used for localization and recognition of trained class instances in an image. The class-wise accuracy is mentioned in Table 1. The code can be found at <https://github.com/brcsomnath/Advanced-GAP>.

Table 1: Class-wise accuracy

Class	Accuracy
0	99.59%
1	99.47%
2	99.90%
3	98.51%
4	99.08%
5	98.32%
6	98.23%
7	98.64%
8	97.43%
9	97.92%
Overall	98.73%

*Equal contribution

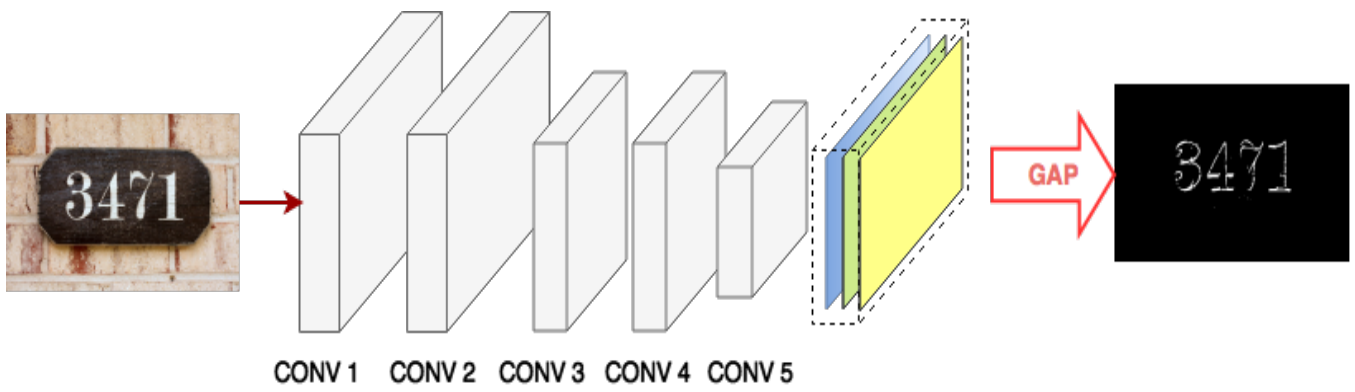


Figure 1: Advanced GAP Architecture